

© GPD Rubber Press Seal 60 mm with fixed and loose flange, closed

GPD(A)/60/F+L/W2/V2A/EPDM 1x(D)



Application range

- For WU core boring (Cl. 1 and 2) or wall sleeve
- For black trough with sheet-type sealing materials and liquid-applied sealing compounds (PMBC, FPD) with fleece according to DIN 18533
- For the load case of pressing water with moderate exposure (W2.1.-E)
- For the load case of pressing water (W2.2.-E)

Material specifications

- Metal press plates (V2A)
- Rubber blank (EPDM)
- Threaded bolt and nuts (V2A)
- fixed and loose flange (V2A)

Technical information


- Gas- and watertight up to 5 bar
- Radon-tight
- Fixed/loose flange construction with 10 mm material thickness and M20 bolts
- Press plate facing away from the flange, 5 mm material thickness
- 160 mm continuous fixed flange and 150 mm continuous loose flange
- Welded threaded bolts
- Sealing width: 60 mm
- Bending of cables and pipes up to 8°
- Fixation by flange
- Optional: Locking nuts opposite the overlapping flange

Test reports

- FHRK GE101: FHRK standard LD10

Front view GPD 60 mm, closed

GPD(A)/60/F+L/W2/V2A/EPDM 1x(D)

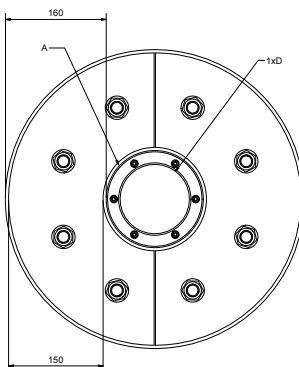

Side view GPD 60 mm, closed

GPD(A)/60/F+L/W2/V2A/EPDM 1x(D)

