

© GPD Rubber Press Seal 60 mm with overlapping flange, split

GPD(A)/G/60/F/V2A/EPDM 1x(D)



Application range

- For WU core boring (Cl. 1 and 2) or wall sleeve
- Split version for subsequent installation

Material specifications

- Metal press plates (V2A)
- Rubber blank (EPDM)
- Threaded bolt and nuts (V2A)

Technical information


- Gas- and watertight up to 5 bar
- Radon-tight
- Metal press plates: 5 mm
- Welded threaded bolts
- Sealing width: 60 mm
- Bending of cables and pipes up to 8°
- Fixation by flange
- Flange projection circumferential at least 10 mm
- Optional: Locking nuts opposite the overlapping flange
- Optional: interchangeable insert

Test reports

- FHRK GE101: FHRK Standard D10


Front view GPD 60 mm, split

GPD(A)/G/60/F/V2A/EPDM 1x(D)

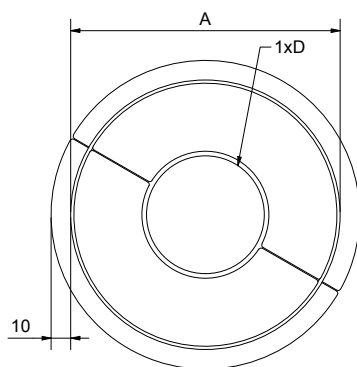


Side view GPD 60 mm, split

GPD(A)/G/60/F/V2A/EPDM 1x(D)

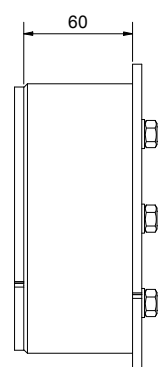

© GPD Rubber Press Seal 60 mm with overlapping flange, split

GPD(A)/G/60/F/V2A/EPDM 1x(D)

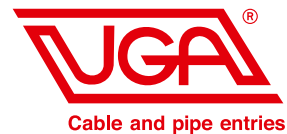

Standard variants

Product name	Core drilling or sleeve pipe diameter	Flange outer diameter
GPD50/G/30/F/V2A/EPDM 1x(D)	50 mm	70 mm
GPD80/G/30/F/V2A/EPDM 1x(D)	80 mm	105 mm
GPD100/G/30/F/V2A/EPDM 1x(D)	100 mm	125 mm
GPD125/G/30/F/V2A/EPDM 1x(D)	125 mm	150 mm
GPD150/G/30/F/V2A/EPDM 1x(D)	150 mm	180 mm
GPD200/G/30/F/V2A/EPDM 1x(D)	200 mm	240 mm
GPD250/G/30/F/V2A/EPDM 1x(D)	250 mm	290 mm
GPD300/G/30/F/V2A/EPDM 1x(D)	300 mm	340 mm
GPD350/G/30/F/V2A/EPDM 1x(D)	350 mm	390 mm
GPD400/G/30/F/V2A/EPDM 1x(D)	400 mm	440 mm
GPD450/G/30/F/V2A/EPDM 1x(D)	450 mm	490 mm
GPD500/G/30/F/V2A/EPDM 1x(D)	500 mm	550 mm
GPD600/G/30/F/V2A/EPDM 1x(D)	600 mm	650 mm
GPD700/G/30/F/V2A/EPDM 1x(D)	700 mm	750 mm