


© GPD Rubber Press Seal 60 mm with interchangeable insert

GPD(A)/G/60/WE(A1)V2A/EPDM (Z)x(D)

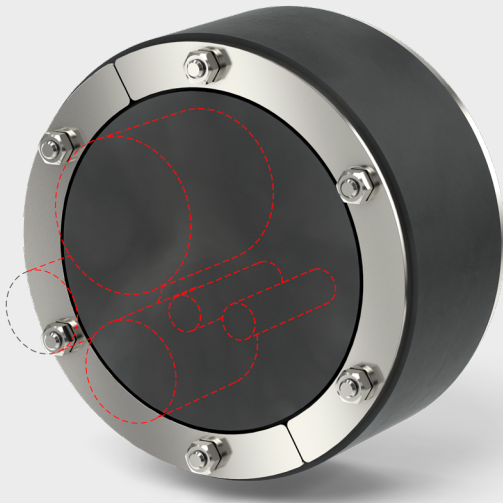

Application range

- For WU core boring (Cl. 1 and 2) or wall sleeve
- For renovation and retrofitting

Material specifications

- Metal press plates (V2A)
- Rubber blank (EPDM)
- Interchangeable insert (EPDM)
- Threaded bolt and nuts (V2A)

Technical information


- Gas- and watertight up to 2 bar
- Radon-tight
- Metal press plates: 5 mm
- Welded threaded bolts
- Sealing width: 60 mm
- Bending of cables and pipes up to 8°
- Reinforced, circumferential rubber edge as depth stop

Test reports

- FHRK GE101: FHRK standard D10
- SGS up to 2 bar


Front view GPD 60 mm with interchangeable insert

GPD(A)/G/60/WE(A1)V2A/EPDM (Z)x(D)

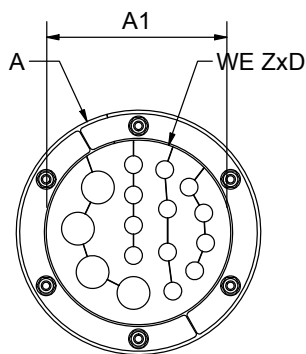

Side view GPD 60 mm with interchangeable insert

GPD(A)/G/60/WE(A1)V2A/EPDM (Z)x(D)

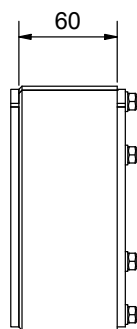

© GPD Rubber Press Seal 60 mm with interchangeable insert

GPD(A)/G/60/WE(A1)V2A/EPDM (Z)x(D)



Variant

Material	Interchangeable insert Ø
GPD100/G/60/WE65/V2A/EPDM (Z)x(D)	65 mm
GPD125/G/60/WE65/V2A/EPDM (Z)x(D)	85 mm
GPD150/G/60/WE65/V2A/EPDM (Z)x(D)	110 mm
GPD200/G/60/WE65/V2A/EPDM (Z)x(D)	125 mm

Maximum occupancy table GPD with interchangeable insert (examples)

GPD-Øa (A)	Maximum diameter cables/pipes			Order number split GPD against pressing water
	Z = 3	Z = 5	Z = 9	
100 mm	up to 22 mm	up to 17 mm	up to 12 mm	GPD100/G/60/WE65/(Z)x(D)
125 mm	up to 30 mm	up to 24 mm	up to 16 mm	GPD100/G/60/WE65/(Z)x(D)
150 mm	up to 42 mm	up to 34 mm	up to 24 mm	GPD150/G/60/WE110/(Z)x(D)
200 mm	up to 50 mm	up to 38 mm	up to 27 mm	GPD200/G/60/WE125/(Z)x(D)


(A) Outer diameter GPD = Inner diameter core drilling or wall sleeve

(A1) Outer diameter interchangeable insert

(Z) Number of cables to be sealed

(D) Diameter of the individual cables

Other combinations with different diameters are also possible.



According to your requirements – in shape and size

Whether other outer or inner diameter, whether square, round or oval: We are happy to manufacture the Rubber press seals (GPD) according to your requirements. An eccentric arrangement of the entry is also possible. You can also find further examples in our special solutions brochure. If you have any questions, please feel free to contact us!

