


◎ Fibre cement wall sleeve, split

FU-FZ/G/(A)/U(L)

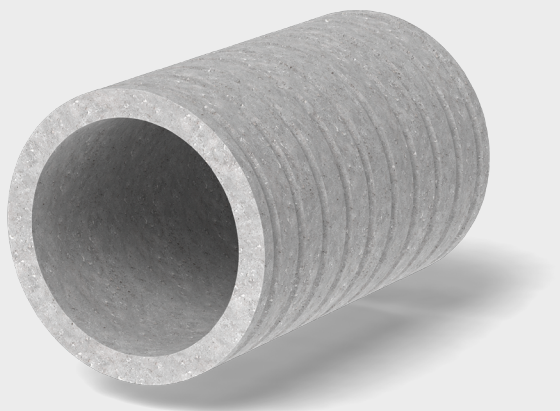

Application range

- In waterproof concrete construction (class 1 and 2)
- For renovation and retrofitting

Material specifications

- Wall sleeve (fibre cement)
- Dirt cover (PE)

Technical information

- Gas- and watertight with suitable sealing insert
- Radon-tight with suitable sealing insert
- The coefficient of thermal expansion of the material corresponds to that of concrete
- Homogeneous connection to concrete, reinforced by the special grooving
- Optional: FU-FZ installation kit and formwork aid (accessories)

● Fibre cement wall sleeve, split

FU-FZ/G/(A)/U(L)



Product dimensions

Product name	Lengths [mm]	Outer diameter [mm]	Nominal diameter
FU-FZ/G/80/U(L)	up to 1000	≤ 140 ±5	80 mm
FU-FZ/G/100/U(L)	up to 1000	≤ 160 ±5	100 mm
FU-FZ/G/125/U(L)	up to 1000	≤ 165 ±5	125 mm
FU-FZ/G/150/U(L)	up to 1000	≤ 190 ±5	150 mm
FU-FZ/G/200/U(L)	up to 1000	≤ 250 ±5	200 mm
FU-FZ/G/250/U(L)	up to 1000	≤ 300 ±5	250 mm
FU-FZ/G/300/U(L)	up to 1000	≤ 350 ±5	300 mm
FU-FZ/G /350/U(L)	up to 1000	≤ 400 ±5	350 mm
FU-FZ/G/400/U(L)	up to 1000	≤ 470 ±5	400 mm
FU-FZ/G/450/U(L)	up to 1000	≤ 520 ±5	450 mm
FU-FZ/G/500/U(L)	up to 1000	≤ 570 ±5	500 mm
FU-FZ/G/600/U(L)	up to 1000	≤ 680 ±5	600 mm
FU-FZ/G/700/U(L)	up to 1000	≤ 800 ±5	700 mm
FU-FZ/G/800/U(L)	up to 1000	≤ 910 ±5	800 mm

* Request if longer pipes are needed



In the spotlight: the split fibre cement wall sleeve

The split fibre cement wall sleeve is optimally suited for sealing already laid cables and for an uneven wall opening. This product impresses: 1. It can seal many cables simultaneously. 2. It is cost-efficient. 3. It seals perfectly.

