


● Wall sleeve with central flange, split

FU/G/(A)/U(L)/O(L)/V2A

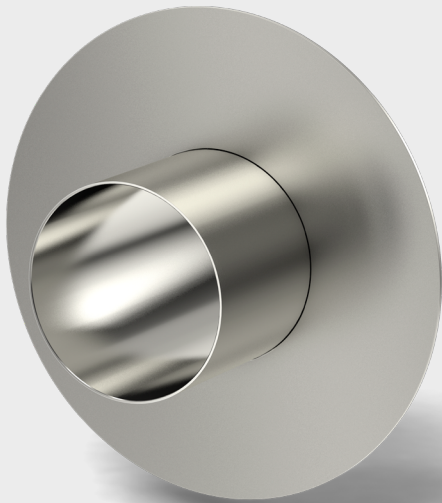

Application range

- In waterproof concrete construction (class 1 and 2)
- For renovation and retrofitting

Material specifications


- Wall sleeve (V2A)
- Dirt cover (PE)

Technical information

- Gas- and watertight with suitable sealing insert
- Radon-tight with suitable sealing insert
- Central flange: 100 mm circumferential
- Wall thickness of the wall sleeve at least 2 mm
- Individual multiple arrangement possible (specify when ordering)
- Partition surfaces with spacer discs
- Scope of delivery: including two pre-assembled dirt covers
- Optional: Central flange with defined lower length U(L) and upper length O(L) for off-center arrangement
- Optional: Sikaflex 11 F Purform
- Optional: wall sleeve also in V4A


Wall section with upper length/lower length

FU/G/(A)/U(L)/O(L)/V2A

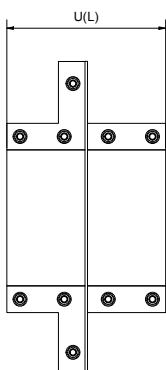

Front view wall sleeve

FU/G/(A)/U(L)/O(L)/V2A

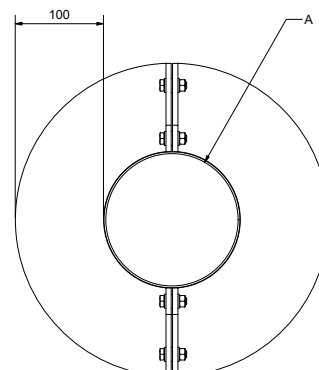

◎ Wall sleeve with central flange, split

FU/G/(A)/U(L)/O(L)/V2A



Product variants

Product name	∅ wall sleeve A	∅a installed pipe or cable
FU/80/U(L)/V2A	80 mm	0 – 51 mm
FU/100/U(L)/V2A	100 mm	0 – 68 mm
FU/125/U(L)/V2A	125 mm	0 – 90 mm
FU/150/U(L)/V2A	150 mm	0 – 114 mm
FU/200/U(L)/V2A	200 mm	0 – 164 mm
FU/250/U(L)/V2A	250 mm	0 – 213 mm
FU/300/U(L)/V2A	300 mm	0 – 260 mm
FU/350/U(L)/V2A	350 mm	0 – 309 mm
FU/400/U(L)/V2A	400 mm	0 – 360 mm
FU/450/U(L)/V2A	450 mm	0 – 410 mm
FU/500/U(L)/V2A	500 mm	0 – 460 mm
FU/600/U(L)/V2A	600 mm	0 – 550 mm
FU/700/U(L)/V2A	700 mm	0 – 650 mm
FU/800/U(L)/V2A	800 mm	0 – 750 mm
FU/900/U(L)/V2A	900 mm	0 – 850 mm
FU/1000/U(L)/V2A	1000 mm	0 – 950 mm
FU/1100/U(L)/V2A	1100 mm	0 – 1050 mm
FU/1200/U(L)/V2A	1200 mm	0 – 1150 mm
FU/1300/U(L)/V2A	1300 mm	0 – 1250 mm

Individual wall sleeve diameters available on request