


# ● Front flange

FU-NA/(A)/U(L)/O(L)/V2A

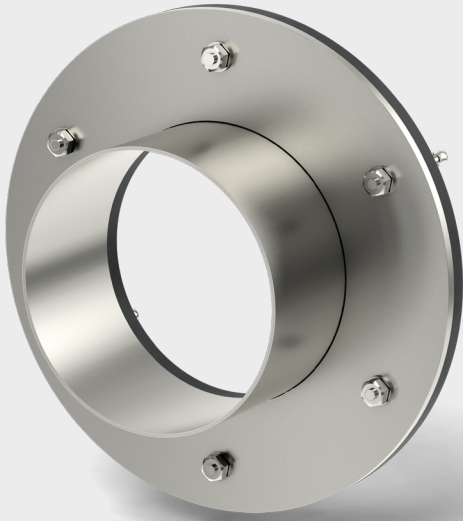

## Application range

- For waterproof concrete construction (Class 1 and 2)
- For renovation and subsequent extension
- Non-split version for new installation of cables and pipes
- For black trough with liquid-applied sealing compounds

## Material specifications

- Wall sleeve (V2A)
- Flange gasket (EPDM)
- Wall anchor (V2A)

## Technical information


- Gas- and watertight up to 2.5 bar for waterproof concrete construction when using Sikaflex 11FC Purform
- Gas- and watertight up to 1 bar for black tank when using Weicon 310 M® Super-Haft
- Radon-tight with suitable sealing insert
- Flange circumferential 60mm
- 10 mm EPDM flange gasket on the wall side
- Individual multiple arrangement possible (specify when ordering)
- Scope of delivery: pre-assembled dirt cover
- Sealants Sikaflex and Weicon 310 additionally available (accessories)
- Optional: base plate square or according to measurement
- Optional: wall sleeve also in V4A

## Test reports

- LRQA up to 2.5 bar on waterproof concrete structure
- LRQA up to 1 bar with black tank


## Front view front flange

FU-NA/(A)/U(L)/O(L)/V2A



## Side view front flange

FU-NA/(A)/U(L)/O(L)/V2A

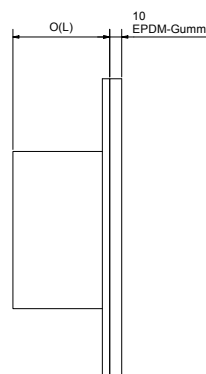

# ● Front flange

FU-NA/(A)/U(L)/O(L)/V2A



## Variants

| Product name             | iØ wall sleeve A | Øa installed pipe or cable | Øa adhesive flange |
|--------------------------|------------------|----------------------------|--------------------|
| FU-NA/80/U(L)/O(L)/V2A   | 80 mm            | 0 – 51 mm                  | 205 mm             |
| FU-NA/100/U(L)/O(L)/V2A  | 100 mm           | 0 – 68 mm                  | 225 mm             |
| FU-NA/125/U(L)/O(L)/V2A  | 125 mm           | 0 – 90 mm                  | 250 mm             |
| FU-NA/150/U(L)/O(L)/V2A  | 150 mm           | 0 – 114 mm                 | 275 mm             |
| FU-NA/200/U(L)/O(L)/V2A  | 200 mm           | 0 – 164 mm                 | 325 mm             |
| FU-NA/250/U(L)/O(L)/V2A  | 250 mm           | 0 – 213 mm                 | 375 mm             |
| FU-NA/300/U(L)/O(L)/V2A  | 300 mm           | 0 – 260 mm                 | 425 mm             |
| FU-NA/350/U(L)/O(L)/V2A  | 350 mm           | 0 – 309 mm                 | 475 mm             |
| FU-NA/400/U(L)/O(L)/V2A  | 400 mm           | 0 – 360 mm                 | 525 mm             |
| FU-NA/450/U(L)/O(L)/V2A  | 450 mm           | 0 – 410 mm                 | 575 mm             |
| FU-NA/500/U(L)/O(L)/V2A  | 500 mm           | 0 – 460 mm                 | 625 mm             |
| FU-NA/600/U(L)/O(L)/V2A  | 600 mm           | 0 – 550 mm                 | 725 mm             |
| FU-NA/700/U(L)/O(L)/V2A  | 700 mm           | 0 – 650 mm                 | 825 mm             |
| FU-NA/800/U(L)/O(L)/V2A  | 800 mm           | 0 – 750 mm                 | 925 mm             |
| FU-NA/900/U(L)/O(L)/V2A  | 900 mm           | 0 – 850 mm                 | 1025 mm            |
| FU-NA/1000/U(L)/O(L)/V2A | 1000 mm          | 0 – 950 mm                 | 1125 mm            |
| FU-NA/1100/U(L)/O(L)/V2A | 1100 mm          | 0 – 1050 mm                | 1225 mm            |
| FU-NA/1200/U(L)/O(L)/V2A | 1200 mm          | 0 – 1150 mm                | 1325 mm            |
| FU-NA/1300/U(L)/O(L)/V2A | 1300 mm          | 0 – 1250 mm                | 1425 mm            |