


◎ Wall sleeve with adhesive / putty flange

FU-NA/KF/(A)/U(L)/O(L)/V2A

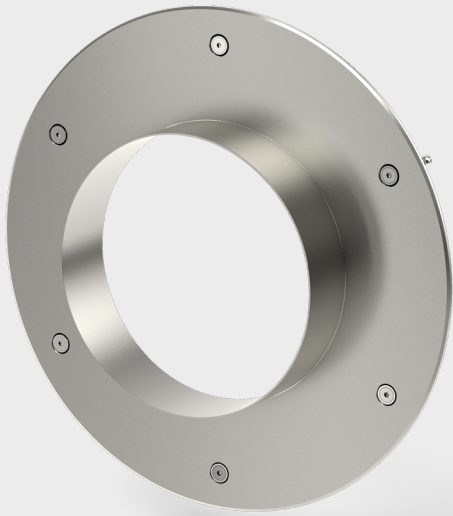

Application range

- For black tub with liquid-applied sealing compounds according to DIN 18533
- For the load case of non-pressing water (W1-E)
- For the load case of pressing water with moderate exposure (W2.1.-E)
- For renovation and subsequent extension
- Non-split version for new installation of cables and pipes

Material specifications

- Wall sleeve and adhesive flange (V2A)

Technical information


- Gas- and watertight with suitable sealing insert
- Radon-tight with suitable sealing insert
- Adhesive flange 60 mm circumferential
- Adhesive flange with 6 mm material thickness
- Standard: 80 mm upper length O(L)
- Individual multiple arrangement possible (specify when ordering)
- Optional: customized upper length O(L) and lower length U(L)
- Optional: base plate square or according to measurement
- Optional: adhesive flange 120 mm circumferential
- Optional: wall sleeve also in V4A

Test reports

- MFPA Leipzig 1 bar with black tub


Front view wall sleeve

FU-NA/KF/(A)/U(L)/O(L)/V2A



Side view wall sleeve

FU-NA/KF/(A)/U(L)/O(L)/V2A



◎ Wall sleeve with adhesive / putty flange

FU-NA/KF/(A)/U(L)/O(L)/V2A



Variants

Product name	iØ wall sleeve A	Øa installed pipe or cable	Øa adhesive flange
FU-NA/KF/80/U(L)/O(L)/V2A	80 mm	0 – 51 mm	205 mm
FU-NA/KF/100/U(L)/O(L)/V2A	100 mm	0 – 68 mm	225 mm
FU-NA/KF/125/U(L)/O(L)/V2A	125 mm	0 – 90 mm	250 mm
FU-NA/KF/150/U(L)/O(L)/V2A	150 mm	0 – 114 mm	275 mm
FU-NA/KF/200/U(L)/O(L)/V2A	200 mm	0 – 164 mm	325 mm
FU-NA/KF/250/U(L)/O(L)/V2A	250 mm	0 – 213 mm	375 mm
FU-NA/KF/300/U(L)/O(L)/V2A	300 mm	0 – 260 mm	425 mm
FU-NA/KF/350/U(L)/O(L)/V2A	350 mm	0 – 309 mm	475 mm
FU-NA/KF/400/U(L)/O(L)/V2A	400 mm	0 – 360 mm	525 mm
FU-NA/KF/450/U(L)/O(L)/V2A	450 mm	0 – 410 mm	575 mm
FU-NA/KF/500/U(L)/O(L)/V2A	500 mm	0 – 460 mm	625 mm
FU-NA/KF/600/U(L)/O(L)/V2A	600 mm	0 – 550 mm	725 mm
FU-NA/KF/700/U(L)/O(L)/V2A	700 mm	0 – 650 mm	825 mm
FU-NA/KF/800/U(L)/O(L)/V2A	800 mm	0 – 750 mm	925 mm
FU-NA/KF/900/U(L)/O(L)/V2A	900 mm	0 – 850 mm	1025 mm
FU-NA/KF/1000/U(L)/O(L)/V2A	1000 mm	0 – 950 mm	1125 mm
FU-NA/KF/1100/U(L)/O(L)/V2A	1100 mm	0 – 1050 mm	1225 mm
FU-NA/KF/1200/U(L)/O(L)/V2A	1200 mm	0 – 1150 mm	1325 mm
FU-NA/KF/1300/U(L)/O(L)/V2A	1300 mm	0 – 1250 mm	1425 mm