

□ Mounting flange with fastening elements

BKD150-AF-235/BE



Application range

- For waterproof concrete construction (Class 1 and 2)
- For black trough with liquid-applied sealing compounds

Material specifications

- Mounting flange (PA/GF)
- Protective cover (PE)
- Fastening elements (galvanized or V4A)
- Flange gasket (EPDM)
- Anchor (PPA)

Technical information


- Gas- and watertight up to 2.5 bar for waterproof concrete construction using Sikaflex[®] 11FC Purform
- Gas- and watertight up to 1 bar for black trough using WEICON[®] Flex 310 M Super-Haft
- Single-sided accommodation of system covers or system inserts
- Frame size: 235 x 235 mm
- Axle spacing: min. 250 mm
- Core drilling diameter: max. 150 mm
- 10 mm EPDM flange gasket on the wall side
- Scope of delivery: pre-assembled dirt cover
- Sealing compounds Sikaflex[®] 11FC Purform and WEICON[®] Flex 310 M Super-Haft also available (accessories)

Test reports

- LRQA with Sikaflex[®] 11FC Purform up to 2.5 bar
- LRQA with WEICON[®] Flex 310 M Super-Haft up to 1 bar with black trough

Front view mounting flange

BKD150-AF-235/BE

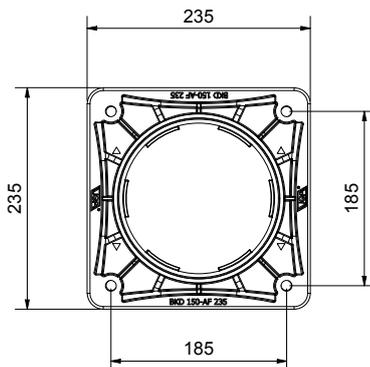

Side view mounting flange

BKD150-AF-235/BE

