

□ Mounting flange with fixed/loose flange construction

BKD150-AF-NA-F+L-W2



Application range

- For black tank with sheet-type sealing materials and liquid-applied sealants (PMBC, FPD) with fleece according to DIN 18533
- For the load case of pressing water with moderate exposure (W2.1-E)
- For the load case of pressing water (W2.2.-E)
- For renovation and retrofitting

Material specifications


- Mounting flange (PA/GF)
- Closure cover (ABS)
- Fastening elements (galvanized)
- Flange gasket (EPDM)
- Fixed and loose flange (V2A or V4A)

Technical information

- Gas- and watertight
- Radon-proof
- One-sided mounting of system covers or system inserts
- Flange outer edge: 555 x 555 mm
- Axle spacing: 250 mm
- Fixed/loose flange construction with 10 mm material thickness and M20 bolts
- 160 mm continuous fixed flange and 150 mm continuous loose flange
- Scope of delivery: pre-assembled blind cover
- BKD150 mounting flange with 10 mm EPDM flange gasket and M10 screws for optimal compression (pre-assembled)
- Individual arrangement possible (specify when ordering)

Front view mounting flange

BKD150-AF-NA-F+L-W2

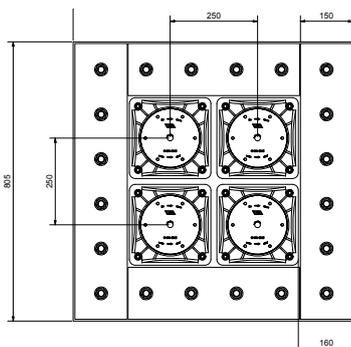

Side view mounting flange

BKD150-AF-NA-F+L-W2

