

System cover with hot-shrink sleeve

BKD150-D/TM



Application range

- For sealing packings and mounting flanges BKD150 as well as compatible systems

Material specifications

- System cover (PC)
- Locknut (PC)
- O-ring (NBR)
- Hot-shrink sleeves (polyolefin)

Technical information


- Gas- and watertight up to 2.5 bar
- Radon-proof
- for cables and pipes $\varnothing a$ 7 – 108 mm
- Sealing using hot-shrink technology
- Bayonet connection with locknut and O-ring
- Scope of delivery: including hot-shrink sleeves
- All covers also available with cold-shrink sleeves
- Sealing plugs for unused pipe sleeves optionally available (accessories)
- D-7 and D-8 covers have closed pipe sleeves with predetermined breaking point for subsequent use

Test reports

- FHRK KD101
- Lloyd's Register up to 2.5 bar


Front view system cover

BKD150-D/TM

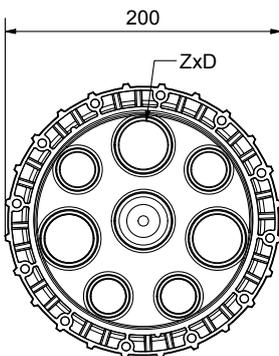

Side view system cover

BKD150-D/TM

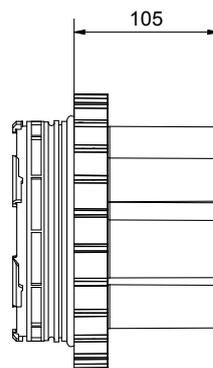

System cover with hot-shrink sleeve

BKD150-D/TM



Standard variants

Product	Diameter of cables and pipes	Details
BKD150-D-1/80-TM	26 – 78 mm	1 pipe sleeve, 1 hot-shrink sleeve
BKD150-D-1/110-TM	36 – 108	1 pipe sleeve, 1 hot-shrink sleeve
BKD150-D-3/59(3/3)-TM	22 – 57	3 pipe sleeves, 3 hot-shrink sleeves
BKD150-D-7/38(7/6)-TM	9 – 37	7 pipe sleeves, 6 hot-shrink sleeves (1 pipe sleeve is closed upon delivery and can be opened if required)
BKD150-D-8/35(4/2)/25(4/2)-TM	7 – 24 / 7 – 34	4 pipe sleeves Ø 35 mm, 2 hot-shrink sleeves; 4 pipe sleeves Ø 25 mm, 2 hot-shrink sleeves (4 pipe sleeves are closed upon delivery and can be opened if required)