


Wall insert with pipe fitting

BKD150-K-SM

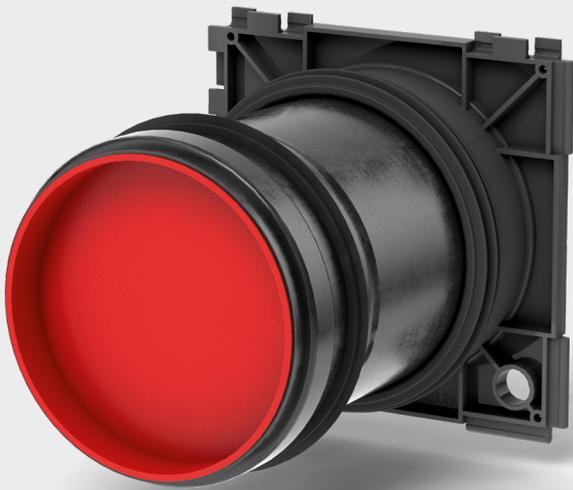

Application range

- In waterproof concrete constructions (Class 1 and 2)

Material specifications


- Wall insert, cover (ABS recycled material)
- 3-rib seal, sealing lip cover (TPE)
- Intermediate pipe, pipe fitting (PVC)
- Seals, water barrier (SBR)

Technical information

- Gas- and watertight up to 0.5 bar
- Radon-proof
- Single-sided accommodation of system covers or system inserts
- For rear connection of smooth-walled cable protection pipes
- Frame size: 220 x 220 mm (per wall insert)
- Axle spacing: 210 mm
- Minimum wall thickness: 200 mm
- Scope of delivery: pre-assembled blind cover and dirt cover for the non-connection side
- Bundle formation by continuous tongue-and-groove connection
- Optional: Spacer BKD150-ASH increases the axle spacing to 250 mm (accessories)


Front view wall insert with pipe fitting

BKD150-K-SM



Side view wall insert with pipe fitting

BKD150-K-SM



Wall insert with pipe fitting

BKD150-K-SM



Standard variants

Product	L = Wall thickness
BKD150-K-SM110/(L)	From 200 mm
BKD150-K-SM125/(L)	From 200 mm
BKD150-K-SM160/(L)	From 200 mm