


Single wall insert

BKD150-K

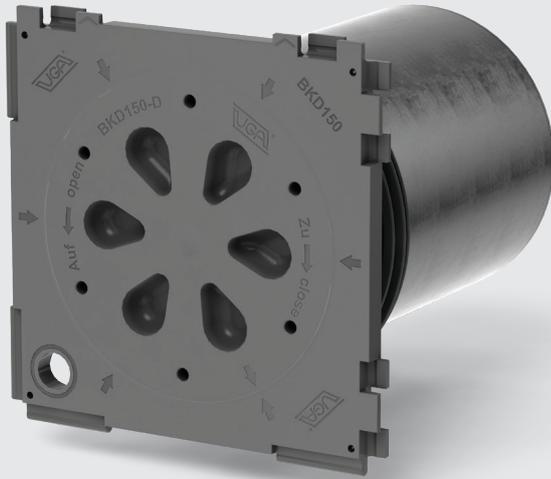

Application range

- In waterproof concrete constructions (Class 1 and 2)

Material specifications

- Wall insert (ABS recycled material)
- 3-rib sealing (TPE)
- Intermediate pipe (PVC)
- Closure cover (ABS recycled material)
- Sealing closure cover (TPE)

Technical information


- Gas- and watertight up to 3 bar
- Radon-proof
- One-sided accommodation of system covers or system inserts
- Frame size: 220 x 220 mm (per wall insert)
- Axle spacing: 210 mm
- Minimum wall thickness: 50 mm
- Wall thickness: (L)
- Scope of delivery: pre-assembled blind cover and dirt cover for the non-connection side
- Bundle formation by continuous tongue-and-groove connection
- Optional: Spacer BKD150-ASH increases the axle spacing to 250 mm (accessories)

Test reports

- LRQA up to 3 bar

Wall inserts: bundle formation without spacer

BKD150-K(2)/1x5/(L)

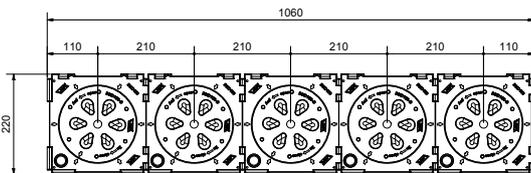

Wall inserts: bundle formation with spacer

BKD150-K(2)/2x5/(L) with BKD150-ASH

