


Double wall insert for double / element walls

BKD150-K2-EW

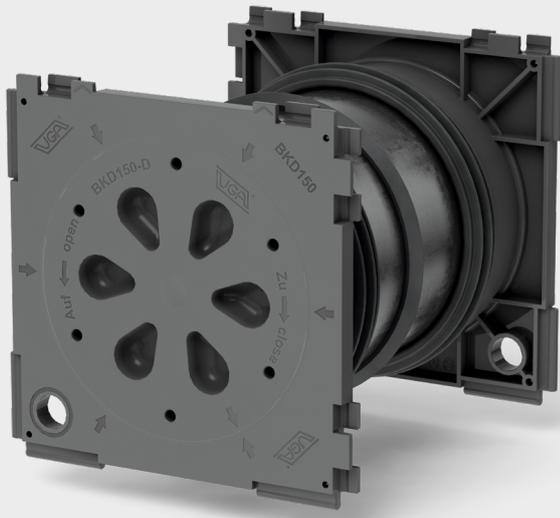

Application range

- For double- / element walls

Material specifications

- Wall insert, cover (ABS recycled material)
- 3-rib sealing (TPE)
- Intermediate pipe (PVC)
- Sealing lip closure cap (TPE)
- Sealing lip center (SBR)

Technical information


- Gas- and watertight up to 3 bar
- Radon-proof
- Double-sided accommodation of system covers or system inserts
- Additional sealing lip as water barrier
- Frame size: 220 x 220 mm (per wall insert)
- Axle spacing: 210 mm
- Minimum wall thickness: 100 mm
- Scope of delivery: pre-assembled blind cover
- Bundle formation by continuous tongue-and-groove connection
- Optional: Spacer BKD150-ASH increases the axle spacing to 250 mm (accessories)

Test reports

- LRQA 3 bar

Front view double wall insert

BKD150-K2-EW

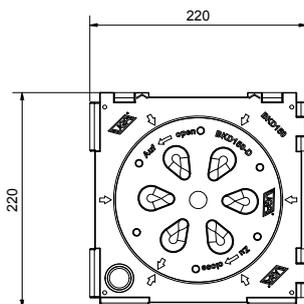

Side view double wall insert

BKD150-K2-EW

