

Double wall insert with fixed and loose flange construction

BKD150-K2-F+L-W2



Application range

- For blacke tank with sheet-type sealing materials and liquid-applied sealants (PMBC, FPD) with fleece according to DIN 18533
- For the load case of pressing water with moderate exposure (W2.1-E)
- For the load case of pressing water (W2.2.-E)
- In waterproof concrete construction (classes 1 and 2) with fresh concrete composite film according to manufacturer specifications

Material specifications

- Wall insert, cover (ABS recycled material)
- 3-rib seal, sealing lip cover (TPE)
- Intermediate pipe (PVC)
- Fixed and loose flange are complete (V2A or V4A)

Technical information


- Gas- and watertight
- Radon-proof
- Bilateral accommodation of system covers or system inserts
- Flange outer edge: 523 x 523 mm
- Axle spacing: 210 mm
- Minimum wall thickness: 100 mm
- Wall thickness: (L)
- Fixed/loose flange construction with 10 mm material thickness and M20 bolts
- 170 mm circumferential fixed flange and 160 mm circumferential loose flange
- Scope of delivery: pre-assembled blind cover
- Individual arrangement possible (specify when ordering)

Test reports

- DIN 18533 compliant

Front view double wall insert

BKD150-K2-F+L-W2

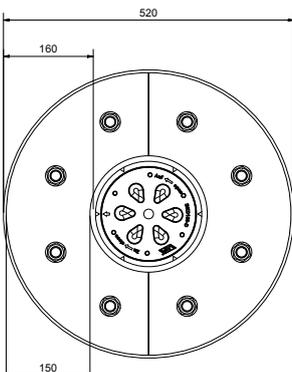

Side view double wall insert

BKD150-K2-F+L-W2

