


# Double wall insert with adhesive/ spatula flange

BKD150-K2-KF-W1/PVC

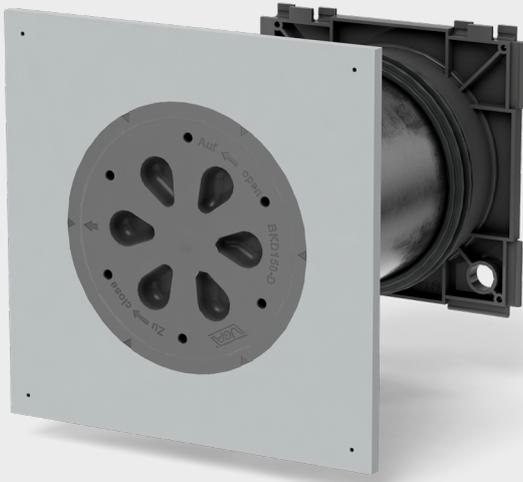

## Application range

- For black tub with liquid-applied sealing compounds according to DIN 18533
- For the load case of non-pressing water (W1-E)
- For the load case of pressing water with moderate exposure (W2.1-E)
- In waterproof concrete construction (classes 1 and 2) with fresh concrete composite film according to manufacturer specifications

## Material specifications

- Wall insert, cover (ABS recycled material)
- 3-rib seal, sealing lip cover (TPE)
- Intermediate pipe (PVC)
- Adhesive flange (PVC)

## Technical information


- Gas- and watertight up to 1 bar
- Radon-proof
- Double-sided accommodation of system covers or system inserts
- Adhesive flange, 50 mm circumferential
- Frame size: 270 x 270 mm (per wall insert)
- Axle spacing: 210 mm
- Minimum wall thickness: 100 mm
- PVC adhesive flange with thickness of 10 mm
- Scope of delivery: pre-assembled blind cover
- Individual multiple arrangement possible (specify when ordering)

## Test reports, approvals and DIN

- MFPA Leipzig up to 1 bar with black tub

## Front view double wall insert

BKD150-K2-KF-W1/PVC

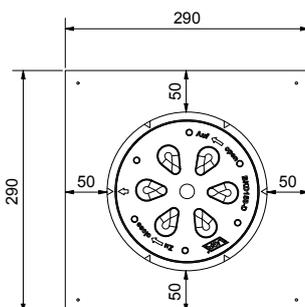

## Side view double wall insert

BKD150-K2-KF-W1/PVC

